



WEEE Number: 80133970

INSTALLATION INSTRUCTIONS LED HIGHBAY SERIES



SAMSUNG
LED
Illuminated



5 YEARS
WARRANTY*

IP65
RATING

TECHNICAL DATA:

MODEL	WATTS	LUMENS	BEAM ANGLE	MATERIAL	CRI	DF	DIMENSION	INPUT POWER	WIRE LENGTH
VT-9-111	100W	14000LM	Sphere 360°	ALUMINUM	70	>0.9	233*156mm	AC:175-265V, 50/60Hz	30CM
VT-9-161	150W	21000LM	Sphere 360°	ALUMINUM	70	>0.9	278*156mm		30CM
VT-9-211	200W	28000LM	Sphere 360°	ALUMINUM	70	>0.9	305*156mm		30CM

*This product contains a light source of energy efficiency class <D>, where <D> shall be replaced by the energy efficiency class of the contained light source.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.



Dimmable



PAP



Non-replaceable control gear




Replaceable (LED only) light source by a professional









MULTI-LANGUAGE
MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.



DIMENSION DIAGRAM:

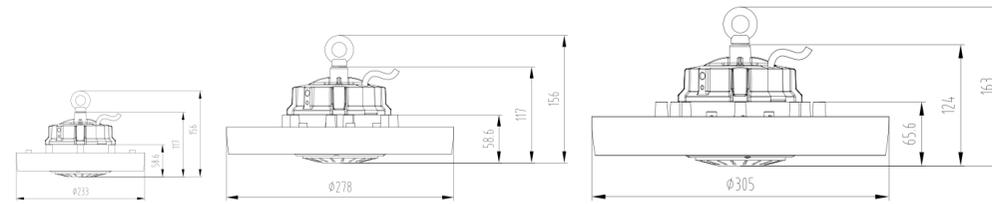

INSTALLATION DIAGRAM:

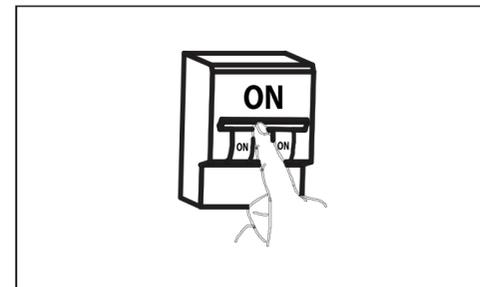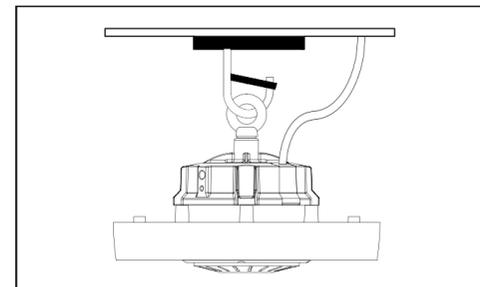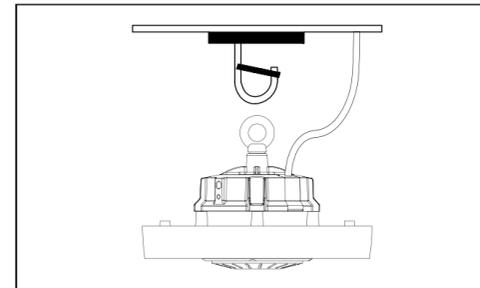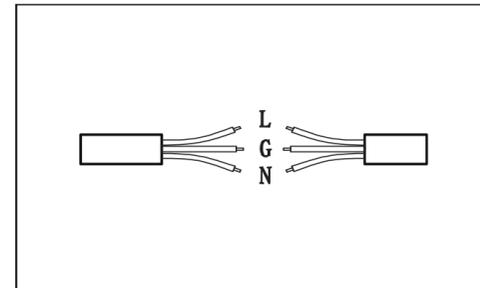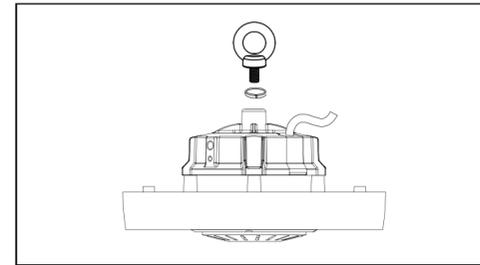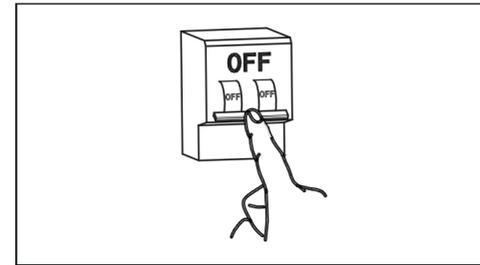

Steps to Remove the Light source for Verification (ONLY FOR MARKET SURVEILLANCE AUTHORITY)

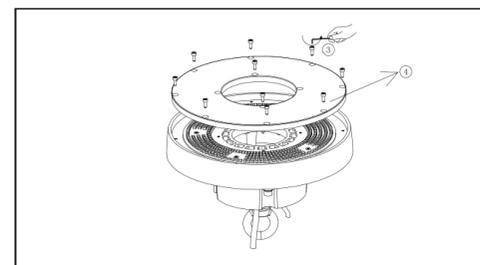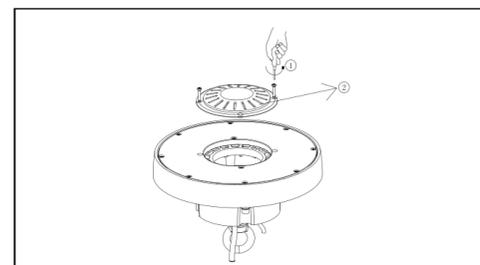

[EN] INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Replace any cracked protective shield.
- Terminal block not included.
- Proper grounding should be ensured throughout the installation.
- To be connected with waterproof cable hose.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach
- Only contact with DC Power

INSTALLATION INSTRUCTION

- Step 1: Switch off the power before starting the installation.
- Step 2: Seal spring shim between bolts, then lock down
- Step 3: Connect the wires as per the wiring diagram
- Step 4: Hand the lamp carefully
- Step 5: Switch on the power and test the light


STEPS TO REMOVE THE LIGHT SOURCE FOR VERIFICATION

1. Unscrew the four screws (M3) on the middle lens with a wrench.
2. Unscrew the 10 screws (M3) on the lens with a wrench.


Note: Light Source Removal will void the warranty.



1-10V Dimmable Driver

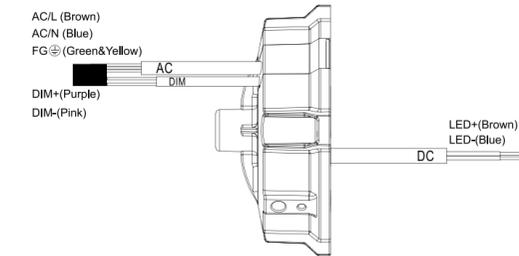

- Contact DIM+ and DIM- with 1-10V dimmer
- Can't be connected with 230V voltage directly.

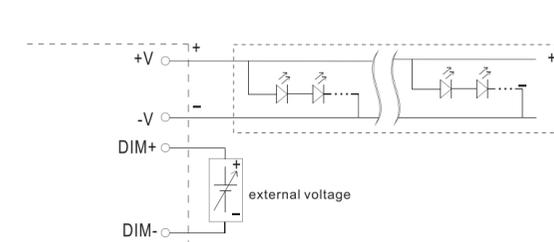

Can't contact "DIM-" with "-V"

