

## INSTALLATION INSTRUCTION

### LED BATTEN FITTING



#### TECHNICAL DATA:

Model	VT-8-41	VT-8-61	VT-8-42	VT-8-62	VT-8-80
Watts	40W	60W	40W	60W	80W
Voltage	AC160-265V	AC160-265V	AC160-265V	AC160-265V	AC160-265V
Lumens	4800lm	7200lm	4800lm	7200lm	9600lm
Beam Angle	120°D	120°D	120°D	120°D	120°D
CRI	>80	>80	>80	>80	>80
Protection Rating	IP20	IP20	IP20	IP20	IP20
Operating Temperature	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C
Dimension	1266*192*82mm	1566*192*82mm	1230*70*66mm	1535*70*66mm	1840*70*66mm

  
**120<sup>++</sup>** LMW  
**HIGH LUMENS**

Save up to  
**85%**  
Energy

**5 YEARS**  
WARRANTY\*



---

## WARNING!

1. Please make sure to turn off the power before starting the installation.
2. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
3. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
4. Proper grounding should be ensured throughout the installation.
5. Installation must be performed by a qualified electrician
6. For Indoor use only.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

## INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

## INSTALLATION INSTRUCTIONS



1. Install the expansion screws on to the ceiling.
  2. Mount the fitting onto the bracket.
  3. Unscrew both ends of the fitting and separate the diffuser.
  4. Feed the wire through the gland and wire the cables into the terminal block.
  5. Refix the diffuser and tighten the screws on both the ends.
-

1



Model No.	LF(mm)
BAT-PRO5FT30W9	1320
BAT-PRO5FT60W9	1320


2



3




①




②

4

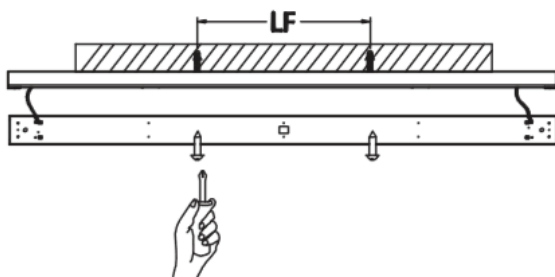

5



②



Outside the connection wire diameter shall apply :  
 3G1.0mm<sup>2</sup> — 3G2.5mm<sup>2</sup>

6



①



②

